Niagara College of Applied Arts and Technology

Parking Lot Reconstruction
Niagara on the Lake Campus
RFP#2019-47

ADDENDUM #4

April 4, 2019

NOTES TO RESPONDENTS:

ADDENDUM #4

This Addendum amends those Tender Documents issued by Niagara College of Applied Arts and Technology for RFT#2019-47 Parking Lot Reconstruction – Niagara on the Lake Campus.

AMENDMENT TO THE TENDER DOCUMENTS

1. **Refer to Revised Appendix 'A' – Item 2.19**
   Clarification – i) Directional Dividing Lines, ii) Crosswalk bars, iv) Stop bars and vi) Diagonal lines shall be Durable Pavement Markings (Field Reacted, Polymeric Pavement marking as per OPSS 710).
   iii) Parking lot lines, v) Accessible Parking Symbols and vii) Vehicle Charging Symbols shall be organic solvent based traffic paint as per Section G to Section 08, Special Provisions – Supplementary Special Provisions clause B36.

2. **Refer to Revised Appendix 'A' – Item 5.1.10**
   The description has been revised.


3. **Refer to Revised Appendix 'A' – Item 5.1.11**
   Clarification – This item includes a cast in place concrete base for each unit, 0.6m x 0.6m x 0.6m and mounting with the manufacturers concrete mount kit. The bolt pattern is attached to this addendum.

4. **Refer to Revised Appendix 'A' – Item 5.1.12**
   Clarification – This item includes the frame and cover for each unit

5. **Refer to Revised Appendix 'A' – Item 5.1.13**
   This item has been deleted.

6. **Refer to Revised Appendix 'A' – Item 5.1.15**
   The description has been revised. Clarification – The concrete base shall be cast in place.

7. **Refer to Revised Appendix 'A' – Item 5.2.2**
   The description has been revised.

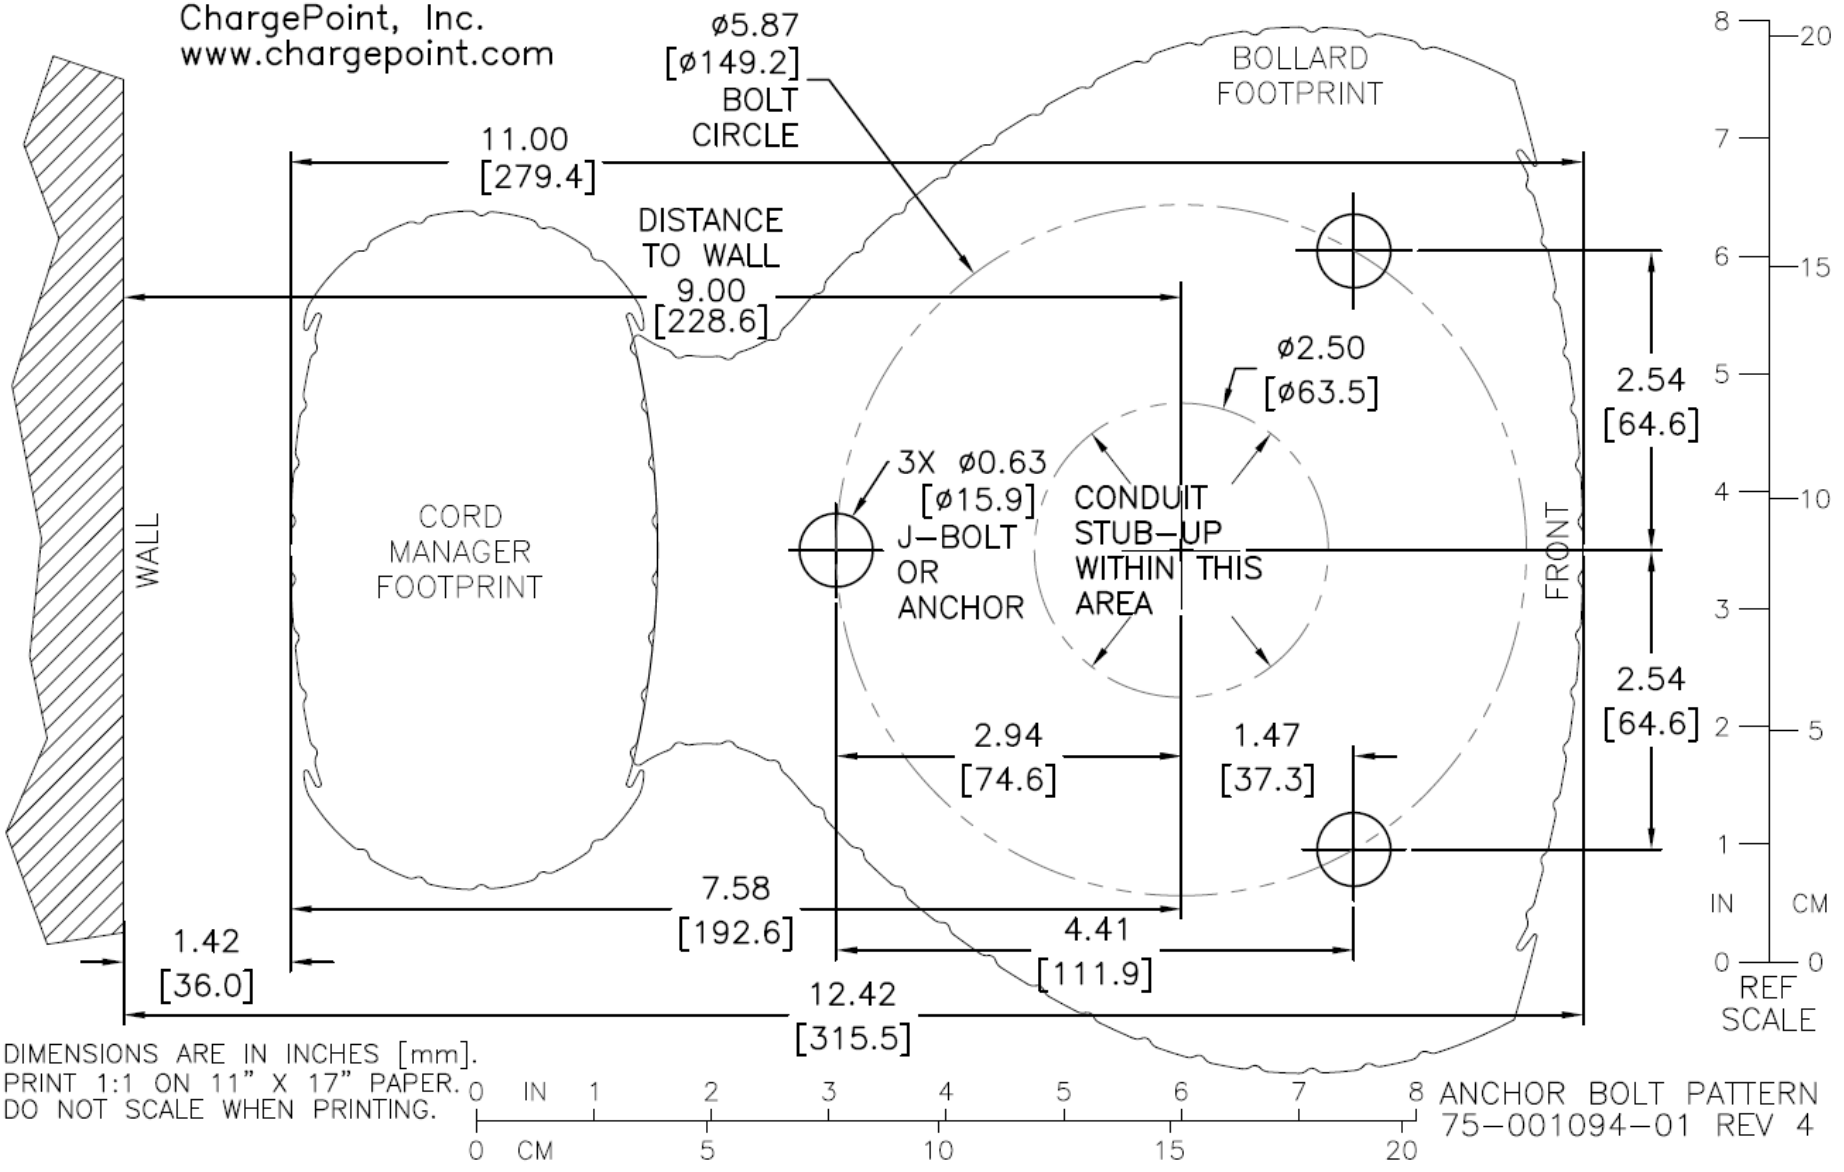

END OF DOCUMENT